

YHM4505

Tiny Size, Low Power, Low Bias Current OP AMP

Features

- Single 1.6V to 5.5V Supply Voltage
- Low 18uA Quiescent Current
- 50nA Quiescent Current in Shutdown
- Ultra-Low 0.2pA Bias Current
- High Input Resistance: 1400Gohm@DC
- Low Input Capacitance: 1.2pF
- Low Input Noise: 3.9uVpp
- Tiny 0.77mm x 1.17mm 6-bump WLP

Applications

- Battery Powered Consumer Device
- Portable Medical Instrument
- Sensor Interface
- Smoke Detectors

General Description

The YHM4505 is 1.6V to 5.5V single supply or $\pm 0.8V$ to $\pm 2.75V$ dual supply, featuring very low quiescent current and shutdown mode, making it suitable for a broad range of battery-powered applications such as portable medical instruments, portable consumer device, and smoke detectors. A combination of extremely low input bias currents, low input current noise and low input voltage noise allows interface to high-impedance sources such as photodiode and piezoelectric sensors.

The YHM4505 comes in a 2x3 array, 6-bump, 0.4mm pitch, 0.77mmx1.17mm wafer-level package (WLP).

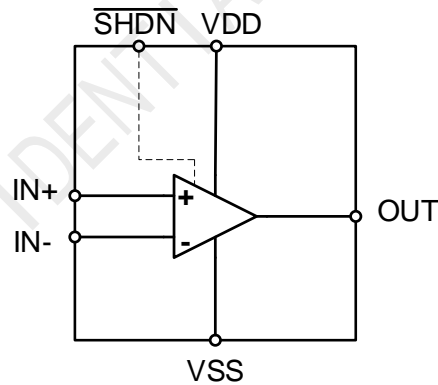


Fig 1. YHM4505 Internal Block Diagram

YHM4505

Tiny Size, Low Power, Low Bias Current OP AMP

YHM4505 Pin Configurations

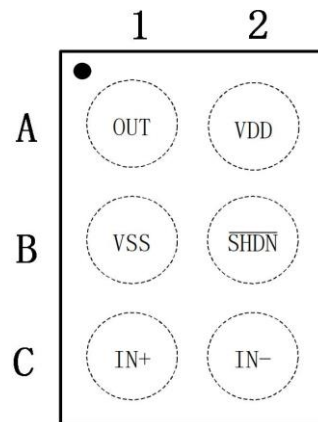


Fig 3. YHM4505 WLP-6 Pin Assignment(Top Through View)

YHM4505 WLP Pin Descriptions

WLP	Name	Description
A1	OUT	Output
A2	VDD	Positive Supply Voltage. Bypass to GND with a 0.1 μ F capacitor
B1	VSS	Negative Supply Voltage
B2	$\overline{\text{SHDN}}$	Pull to VSS to activate shutdown mode. Keep High to enable AMP
C1	IN+	Positive Input
C2	IN-	Negative Input

Tiny Size, Low Power, Low Bias Current OP AMP

1 Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Disclaimer: YHMICROS reserves the right to make any change in circuit design, specification or other related things if needed without notice at any time.

Symbol	Parameters		Min.	Max.	Unit
VDD, $\overline{\text{SHDN}}$	VDD, $\overline{\text{SHDN}}$ to VSS		-0.3	6	V
IN+, IN-, OUT	IN+, IN-, OUT to GND		GND-0.3	VDD+0.3	V
I_{IN}	Continuous Input Current (any pins)			±20	mA
t_{SCD}	Output Short-Circuit Duration to GND			10	s
t_{PD}	Total Power Dissipation at $T_A=25^\circ\text{C}$			500	mW
T_{STG}	Storage Junction Temperature		-65	+150	$^\circ\text{C}$
T_J	Operating Junction Temperature			+150	$^\circ\text{C}$
T_L	Lead Temperature (Soldering, 10 Seconds)			+260	$^\circ\text{C}$
θ_{JA}	Thermal Resistance, Junction-to-Ambient (100mm ² pad of 1 oz. copper)			80 ⁽¹⁾	$^\circ\text{C/W}$
IN+, IN-	Electrostatic Discharge Capability	Human Body Model, EIA/JESD22-A114	2		KV
		Charged Device Model, JESD22-C101	1		
All Other Pins	Electrostatic Discharge Capability	Human Body Model, EIA/JESD22-A114	2		KV
		Charged Device Model, JESD22-C101	1		

Note 1. Refer to JEDEC JESD51-7, use a 4-layerboard

2 Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance.

Parameters	Min.	Max.	Unit
Single Supply Voltage	1.6	5.5	V
Dual Supply Volage	±0.8	±2.75	V
Input Voltage	VSS	VDD-0.6	V
Ambient Operating Temperature, T_A	-40	85	$^\circ\text{C}$

Tiny Size, Low Power, Low Bias Current OP AMP

3 Detailed Electrical Characteristics

(VDD = 3.3V, VSS = 0V, VIN+ = VIN- = VCM = VDD/2, RL = 10kΩ to VDD/2, SHDN = VDD, TA = -40°C to +85°C.

Typical values are at TA = +25°C, unless otherwise noted TA = +25°C, unless otherwise noted.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
POWER SUPPLY						
Supply Voltage Range	VDD	Guaranteed by PSRR, 0°C ≤ TA ≤ +70°C	1.6		5.5	V
		Guaranteed by PSRR, -40°C ≤ TA ≤ +85°C	1.8		5.5	
Quiescent Supply Current	I _{VDD}	TA = +25°C		18		μA
		-40°C ≤ TA ≤ +85°C			25	
Power-Supply Rejection Ratio	PSRR	VDD = 1.8V to 5.5V	TA = +25°C	108		dB
			-40°C ≤ TA ≤ +85°C	94		
		0°C ≤ TA ≤ +70°C, VDD = 1.6V to 5.5V	91			
Shutdown Supply Current	I _{SHDN}	V _{SHDN} ≤ V _{IL}		50		nA
AMP Turn-On Time	t _{AMP_ON}	VDD = 3.3V, V _{SHDN} = 0 to 3.3V (keep high) V _{OUT} = V _{SETTLE} (1% Accuracy)		110		μs
DC SPECIFICATIONS						
Input Voltage Range	V _{IN+} , V _{IN-}	Guaranteed by CMRR	VSS		VDD-0.6	V
Input Offset Voltage	V _{OS}	TA = +25°C		0.2		mV
Input Offset Voltage Drift	ΔV _{OS}			0.3		μV/°C
Input Bias Current	I _B	TA = +25°C		±0.2		pA
Input Offset Current	I _{OS}			±0.05		
Common-Mode Rejection Ratio	CMRR	-0.1V ≤ V _{CM} ≤ VDD - 0.6V, TA = +25°C		107		dB
		0 ≤ V _{CM} ≤ VDD - 0.8V, -40°C ≤ TA ≤ +85°C		93		
Open-Loop Gain	A _{VO}	V _{OUT} = 0.25V from rails		141		dB
		V _{OUT} = 0.4V from rails, RL = 600Ω		138		
Output Voltage Swing	V _{OH}	VDD - V _{OUT}	RL = 10kΩ		5	mV
			RL = 600Ω		71	
	V _{OL}	V _{OUT}	RL = 10kΩ		4	
			RL = 600Ω		51	
Short-Circuit Current	I _{SC}			60		mA
AC SPECIFICATIONS						
Gain-Bandwidth	GBW			100		KHz
Slew Rate	SR	0 ≤ V _{OUT} ≤ 2V		40		mV/μs
Input Voltage Noise Density	E _n	f _{sw} = 1kHz		53		nV/√Hz
Input Voltage Noise		0.1Hz ≤ f _{sw} ≤ 10Hz		3.9		μV _{pp}
Input Current Noise Density		f _{sw} = 1kHz		2.6		fA/√Hz
Phase Margin		CL = 20pF		62		°

YHM4505

Tiny Size, Low Power, Low Bias Current OP AMP



Input Resistance (Note 2)	R_{IN}	AC@100Hz	1.4	G Ω
		AC@10Hz	14	
		DC@0.1Hz	1400	
Input Capacitance	C_{IN}		1.2	pF
Capacitive Loading	C_L	No sustained oscillation	280	pF
LOGIC INPUT				
Shutdown Input Low	V_{IL}		0.4	V
Shutdown Input High	V_{IH}		1.3	V
Shutdown Input Leakage Current	I_{IL}/I_{IH}		2	nA

Note 1: All specifications are 100% production tested at $T_A = +25^\circ\text{C}$, unless otherwise noted. Specifications are over $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ and are guaranteed by design.

Note 2: Guaranteed by design; not production test.

YHMICROS CONFIDENTIAL

Tiny Size, Low Power, Low Bias Current OP AMP

4 Detailed Description

4.1 General Introduction

The YHM4505 is 1.6V to 5.5V single supply or $\pm 0.8V$ to $\pm 2.75V$ dual supply, featuring very low quiescent current and shutdown mode, making it suitable for a broad range of battery-powered applications such as portable medical instruments, portable consumer device, and smoke detectors. A combination of extremely low input bias currents, low input current noise and low input voltage noise allows interface to high-impedance sources such as photodiode and piezoelectric sensors. The device is also ideal for general-purpose signal processing functions such as filtering and amplification in a broad range of portable, battery-powered applications.

4.2 Low Input Bias Current

This op-amp features ultra-low 0.2pA (typ.) input bias current. For the $-40^{\circ}C$ to $+85^{\circ}C$ temperature range, the variation in the input bias current is very small with changes in the input voltage due to very high input impedance.

4.3 Shutdown Operation

The device features an active-low shutdown mode that lowers the quiescent current to less than 0.1 μA . In shutdown mode the inputs and output are high impedance. This allows multiple devices to be multiplexed onto a single line without the use of external buffers. Keep \overline{SHDN} high for normal OP AMP operation. The shutdown high (VIH) and low (VIL) threshold voltages are designed for ease of integration with digital controls like microcontroller outputs. These thresholds are independent of supply, eliminating the need for external pulldown circuitry.

4.4 High-Impedance Sensor Front-Ends

The ICs interface to both current-output sensors, such as photodiodes, and high-impedance voltage sources, such as ECG. For current-output sensors, a transimpedance amplifier is the most noise-efficient method for converting the input signal to a voltage. High-value feedback resistors are commonly chosen to create large gains, while feedback capacitors help stabilize the amplifier by cancelling any poles introduced in the feedback function by the highly capacitive sensor or cabling. A combination of low-current noise and low-voltage noise is important for these applications. Take care to calibrate out photodiode dark current if DC accuracy is important. The high bandwidth and slew rate also allow AC signal processing in certain medical photo-diode sensor applications such as pulse oximetry.

For voltage-output sensors, a noninverting amplifier is typically used to buffer and/or apply a small gain to the input voltage signal. Due to the extremely high impedance of the sensor output, a low input bias current with minimal temperature variation is very important for these applications.

4.6 System design

For best performance, follow standard high-impedance layout techniques, which include the following:

- Using shielding techniques to guard against parasitic leakage paths. For example, put a trace connected to the noninverting input around the inverting input.
- Minimizing the amount of stray capacitance connected to op amp's inputs to improve stability. To achieve this, minimize trace lengths and resistor leads by placing external components as close as possible to the package.
- Use separate analog and digital power supplies.
- When used with a single supply, bypass VDD with a 0.1 μF capacitor to ground.

YHM4505



Tiny Size, Low Power, Low Bias Current OP AMP

4.7 Extended ESD Protection

ESD protection structures are incorporated on all pins to protect against electrostatic discharges up to $\pm 2\text{kV}$ to 4kV (HBM) encountered during handling and assembly. IN+/IN- are further protected against ESD up to 12kV (Air-Gap Discharge), and 8kV (Contact Discharge) without damage. The ESD structures with- stand high ESD both in normal operation and when the device is powered down. After an ESD event, the devices continue to function without latch-up.


YHMICROS CONFIDENTIAL

YHM4505


Tiny Size, Low Power, Low Bias Current OP AMP

Package Dimensions


WLCSP-6 0.77x1.17x0.574

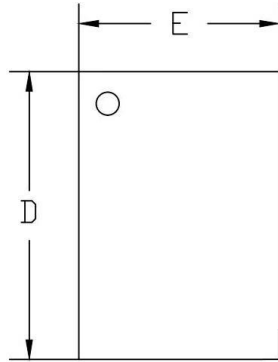

(MARK SIDE)

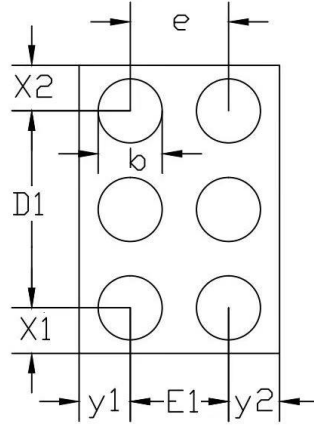

BOTTOM VIEW
(BALL SIDE)

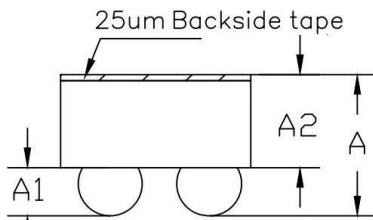

SIDE VIEW

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.534	0.574	0.614
A1	0.176	0.196	0.216
A2	0.358	0.378	0.398
D	1.150	1.170	1.190
D1	0.800BSC		
E	0.750	0.770	0.790
E1	0.400BSC		
b	0.240	0.260	0.280
e	0.400BSC		
x1	0.185 REF		
x2	0.185 REF		
y1	0.185 REF		
y2	0.185 REF		

YHM4505



Tiny Size, Low Power, Low Bias Current OP AMP

Ordering Information

Part Number	Temp Range	Pin Package	Top Mark	MOQ
YHM4505W6T	-40°C to 85°C	6 WLCSP	YWW LOT	3000

T = Tape and reel.

YWW: Date Code. Y = year, WW = week. For example, YWW = 112 means Year 2021, Week 12.

LOT: The last three number of LOTID.

YHMICROS CONFIDENTIAL

Email Requests to: SALES@YHMICROS.COM

YHMicros Website: WWW.YHMICROS.COM